



iS065C08CD2


Silicon-Carbide Schottky Barrier Diode

Datasheet

1. Product Information

1.1 Features

- Zero Reverse Recovery
- Temperature-Independent Switching Behavior
- Positive Temperature Coefficient Device Suitable for Parallel Connection Application
- Junction Temperature Range from -55°C to 175°C
- Suitable for High Power/Temperature Application
- High Surge Current Ruggedness and High Reliability



1.2 Package Type

TO252-2L



1.3 Quick Reference

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|-------------------------------|---------------------------------|---|-----|------|------|------|
| Limiting Values | | | | | | |
| P_{tot} | Total Power Dissipation | $T_C = 25\text{ }^\circ\text{C}$ | - | - | 100 | W |
| I_F | Forward Current | $T_C = 25\text{ }^\circ\text{C}$ | - | - | 24 | A |
| | | $T_C = 135\text{ }^\circ\text{C}$ | - | - | 12 | |
| | | $T_C = 155\text{ }^\circ\text{C}$ | - | - | 8 | |
| Static Characteristics | | | | | | |
| V_{RRM} | Peak Repetitive Reverse Voltage | $T_C = 25\text{ }^\circ\text{C}$ | 650 | - | - | V |
| V_F | Forward Voltage | $T_C = 25\text{ }^\circ\text{C}, I_F = 8\text{ A}$ | - | 1.30 | 1.50 | |
| | | $T_C = 175\text{ }^\circ\text{C}, I_F = 8\text{ A}$ | - | 1.55 | 1.80 | |

2. Ordering Code & Marking Information

| Ordering Code | Marking Information |
|---------------|---|
| iS065C08CD2 | <div style="border: 1px solid black; padding: 5px; display: inline-block;"> iS065C08C XXXXX </div> X : Date Code |

3. Pin Description
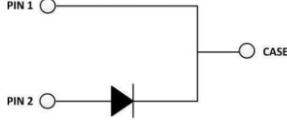
| Pin | Description | Simplified Outline | Symbol |
|-----|-------------|---|---|
| 1 | Cathode(-) |  |  |
| 2 | Anode(+) | | |

4. Limiting Values

| Symbol | Parameter | | Rating | Unit |
|------------------|--------------------------------------|--|------------|--------|
| V _{DC} | DC Reverse Voltage | T _C = 25 °C | 650 | V |
| I _F | Continuous Forward Current | T _C = 25 °C | 24 | A |
| | | T _C = 135 °C | 12 | |
| | | T _C = 155 °C | 8 | |
| I _{FRM} | Surge Repetitive Current | T _C = 25 °C, t _p = 10 ms, half sine wave D = 0.1 | 37 | A |
| I _{FSM} | Surge Non-Repetitive Current | T _C = 25 °C, t _p = 10 ms, half sine pulse | 67 | |
| P _D | Total Power Dissipation | T _C = 25 °C | 100 | W |
| T _{stg} | Storage Temperature | | - 55 ~ 175 | °C |
| T _j | Operation Junction Temperature | | - 55 ~ 175 | |
| R _{θJC} | Thermal Resistance- Junction to Case | | 1.5 | °C / W |

5. Electrical Characteristics (T_A = 25 °C Unless Otherwise Noted)

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|-------------------------|---------------------------|---|-----|------|------|------|
| Static Characteristics | | | | | | |
| V _{DC} | DC Blocking Voltage | I _R = 100 μA | 650 | - | - | V |
| V _F | Forward Voltage | I _F = 8 A, T _C = 25 °C | - | 1.30 | 1.50 | |
| | | I _F = 8 A, T _C = 175 °C | - | 1.55 | 1.80 | |
| I _R | Reverse Current | V _R = 650 V, T _C = 25 °C | - | 1 | 24 | μA |
| | | V _R = 650 V, T _C = 175 °C | - | 5 | 64 | |
| Dynamic Characteristics | | | | | | |
| C | Total Capacitance | V _R = 0 V, f = 1 MHz | - | 395 | - | pF |
| | | V _R = 200 V, f = 1 MHz | - | 42 | - | |
| | | V _R = 400 V, f = 1 MHz | - | 34 | - | |
| Q _C | Total Capacitance Charge | V _R = 400 V | - | 22 | - | nC |
| E _C | Capacitance Stored Energy | V _R = 400 V | - | 3.3 | - | μJ |

6. Typical Characteristics

Fig 1. Power Capability

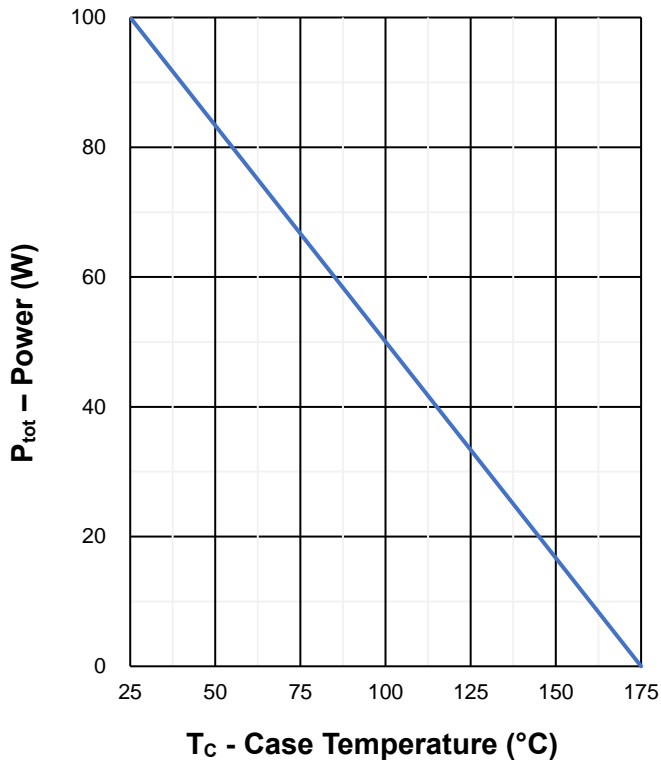


Fig 2. Current Capability

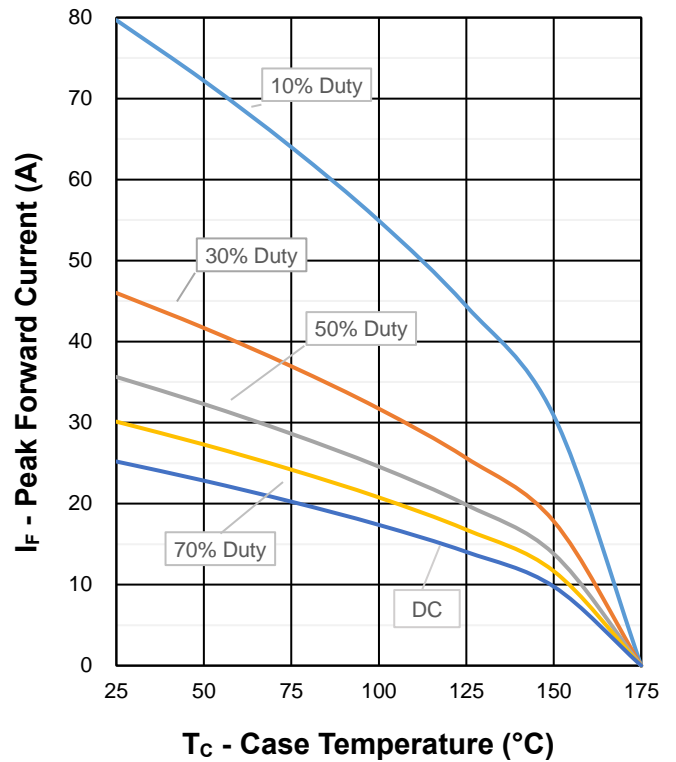


Fig 3. Forward Characteristics


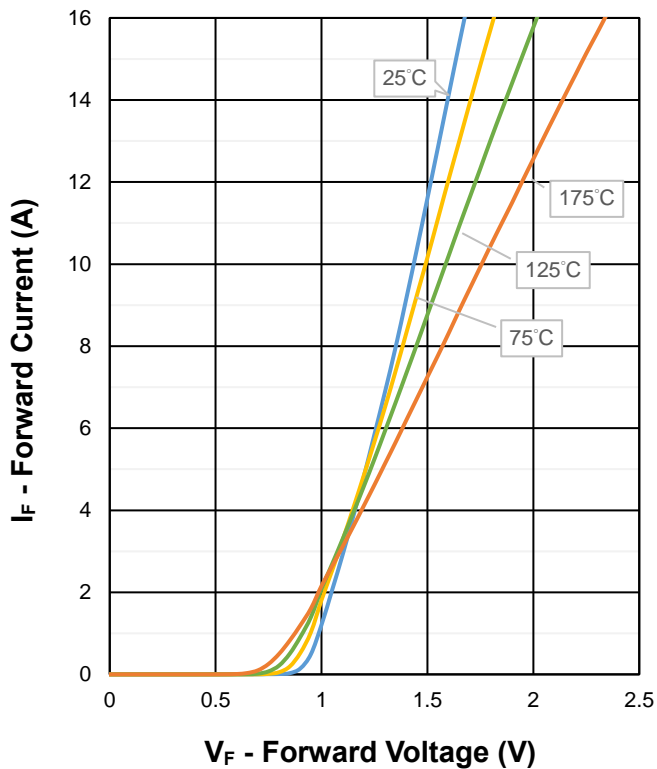


Fig 4. Transient Thermal Impedance

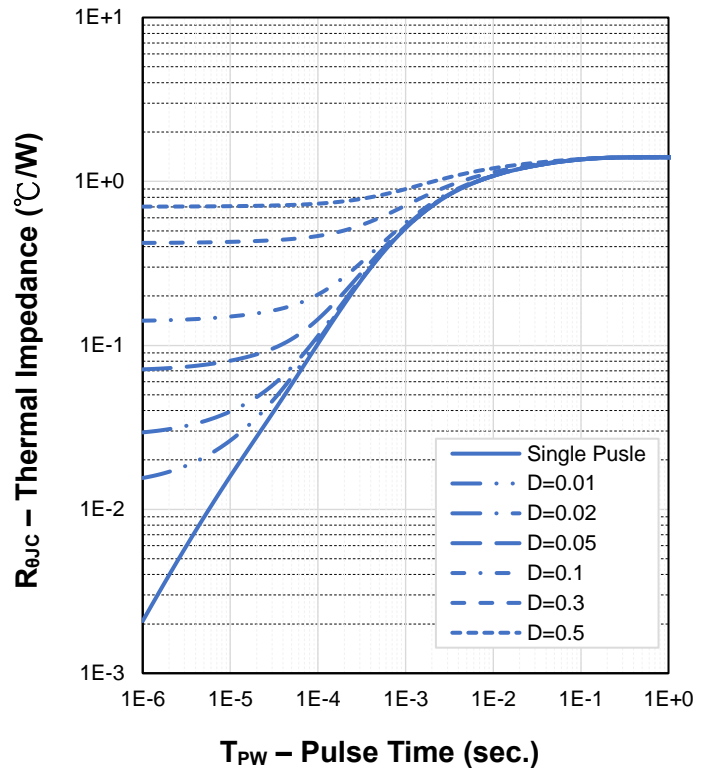

6. Typical Characteristics (cont.)

Fig 5. Reverse Characteristics

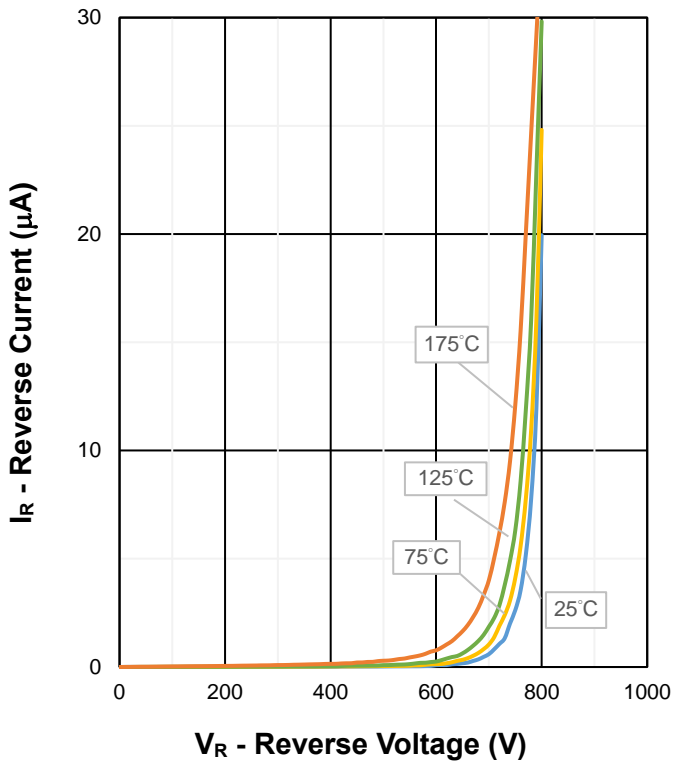


Fig 6. Capacitance vs. Reverse Voltage

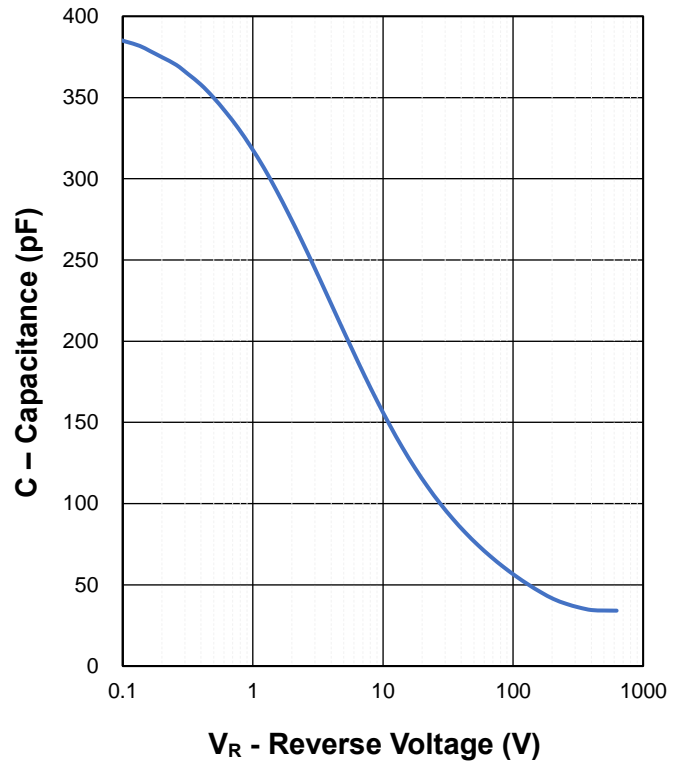


Fig 7. Capacitance Charge


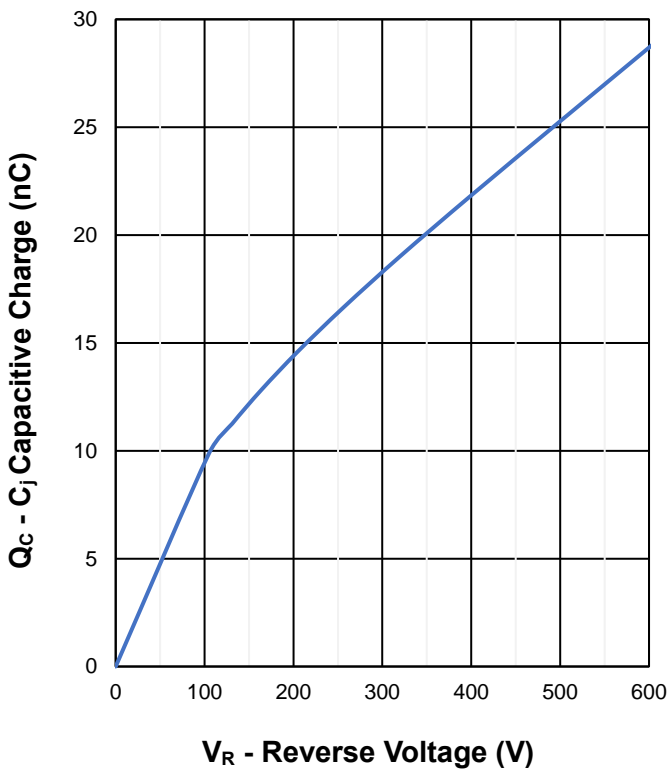


Fig 8. Capacitance Stored Energy

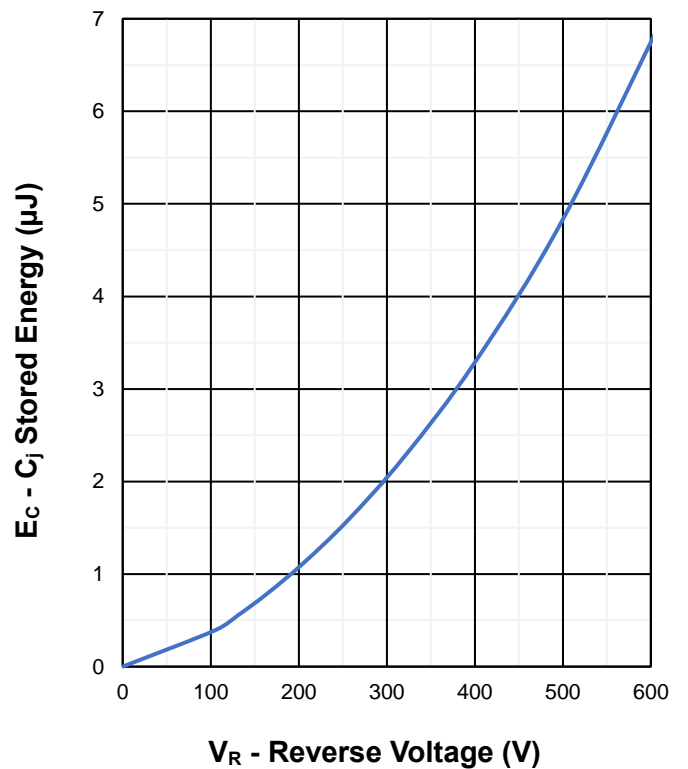

Important Notice

1. inergy Technology Inc. reserves the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete.
2. The Products of inergy Technology Inc. have been tested, verified and passed by our specifications and standards, and are 100% inspected before delivery from the factory. It is strongly recommended that the customers shall perform verifications of the functionality, compatibility, and reliability of the environment or platform that you used. inergy Technology Inc. would not be liable for or guarantee anything that is related to the functionality, compatibility, and reliability of the environment or platform used by the customers.